

* = Isı izi ve çekme izi olabilir

Moments of inertia: X: 177578251.04

Y: 5993109251.85

Product of inertia: XY: -1017385776.05


Radii of gyration: X: 268.71

Y: 1561.06

Principal moments and X-Y directions about centroid:

I: 4260191.73 along [0.91 -0.42]

J: 10940370.44 along [0.42 0.91]

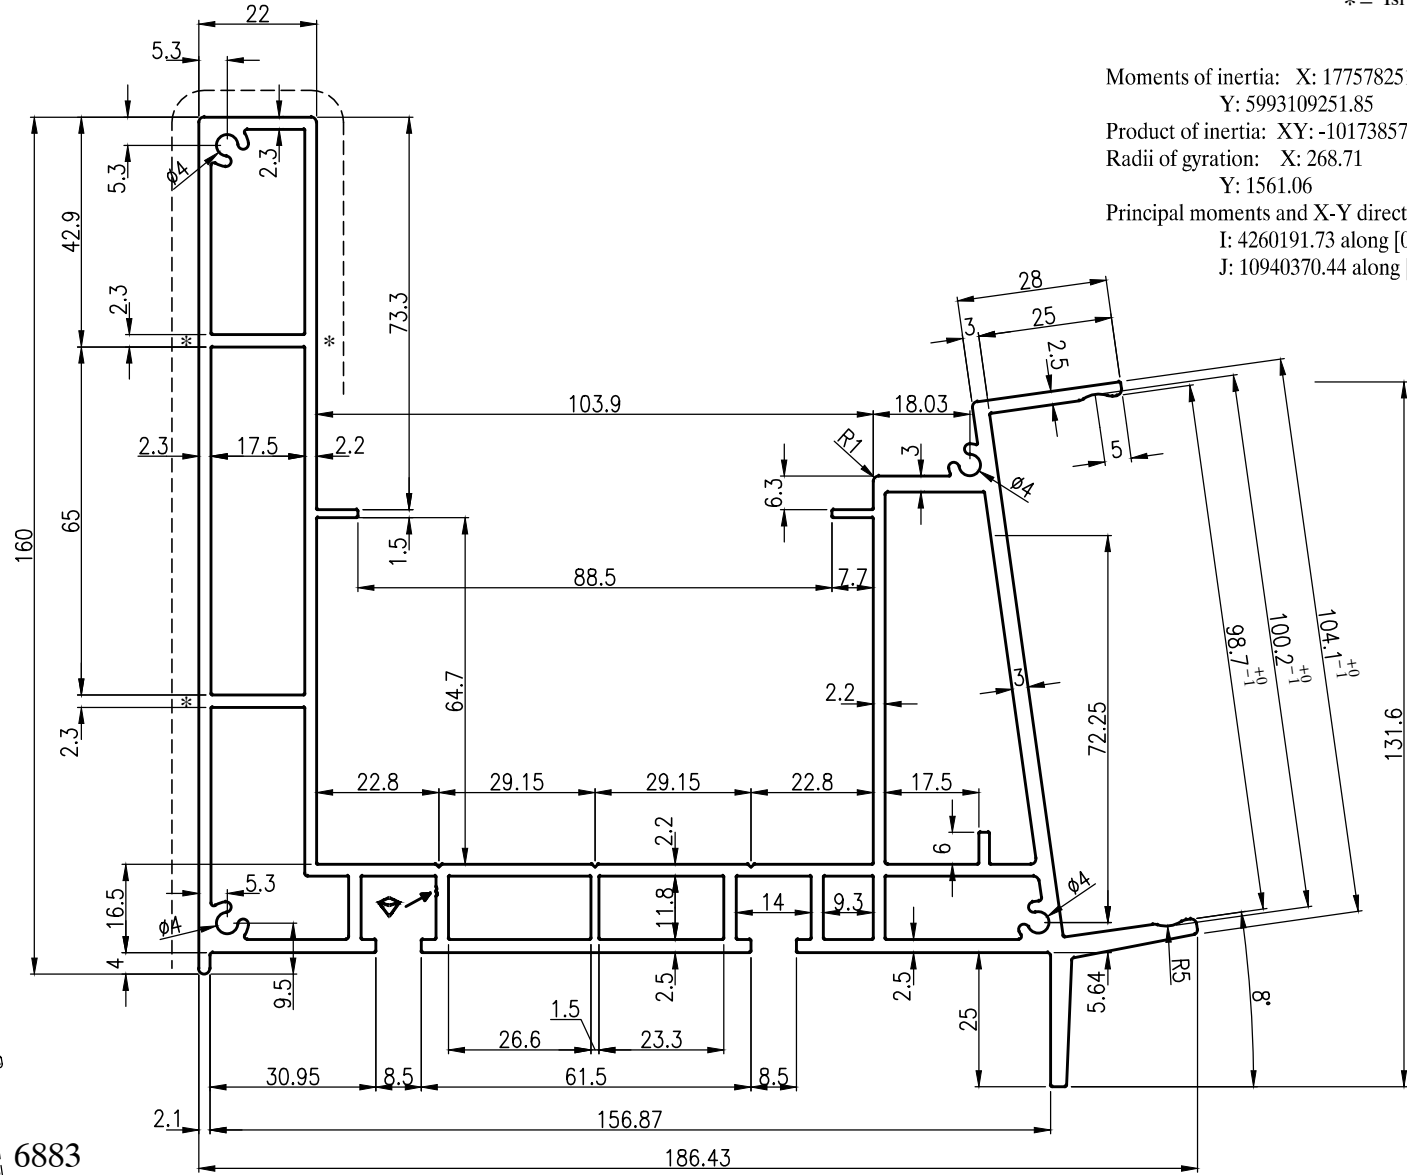

6883

Yüzey Kalitesi

	Dekoratif	Decorative
X	Standart	Standard
	Koruma	Protective anodizing

Tarih	14,01,2021	Alan	2459.3 mm ²	Şekil Fakt.	Ex-Oranı	Tolerans	EN 755-9
Çizen	Yavuz Soyyiğit	Gramaj	6.640 Kg/m	2-75	20-100	Malzeme	EN-AW 6060 T6
Ölçek	1/1 - 1/1	Çevre	1064 mm	30	6" 7" 9"	Kovan Çapı	Ø160 Ø185 Ø235