

*= Isı izi ve çekme izi olabilir

Moments of inertia: X: 948128722.17

Y: 6207462176.04

Product of inertia: XY: -2419465781.10



Radii of gyration: X: 611.15

Y: 1563.78

Principal moments and X-Y directions about centroid:

I: 4409478.30 along [0.91 -0.41]

J: 12190163.87 along [0.41 0.91]

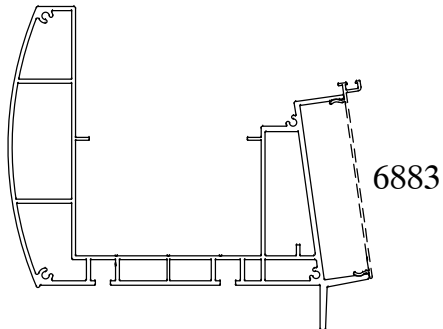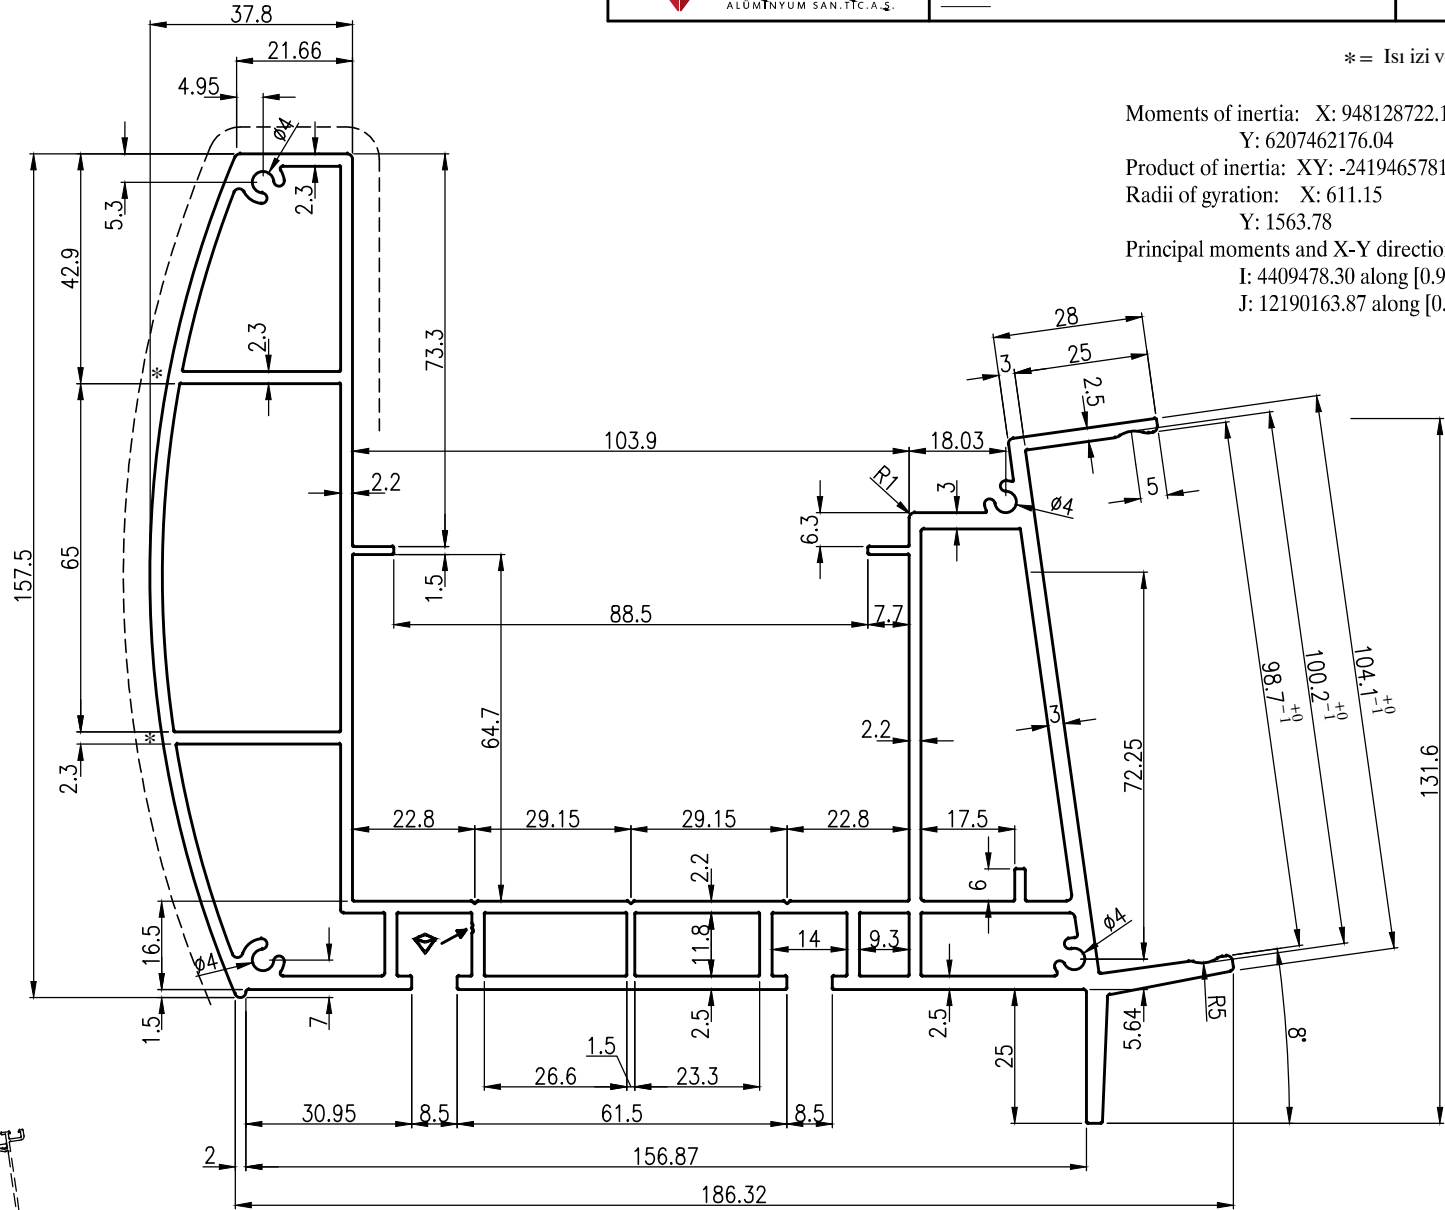

Yüzey Kalitesi

	Dekoratif	Decorative
X	Standart	Standard
	Koruma	Protective anodizing

Tarih	14,01,2021	Alan	2538.4 mm ²	Şekil Fakt.	Ex-Oranı	Tolerans	EN 755-9
Çizen	Yavuz Soyyiğit	Gramaj	6.854 Kg/m	2-75	20-100	Malzeme	EN-AW 6060 T6
Ölçek	1/1 - 1/1	Çevre	1063 mm	30	6" 7" 9"	Kovan Çapı	Ø160 Ø185 Ø235