

Moments of inertia: X: 7585652134.04

Y: 3929424132.17

Product of inertia: XY: -5458695857.51



Radii of gyration: X: 2985.83

Y: 2148.98

Principal moments and X-Y directions about centroid:

I: 445054.85 along [0.00 -1.00]

J: 1656495.74 along [1.00 0.00]

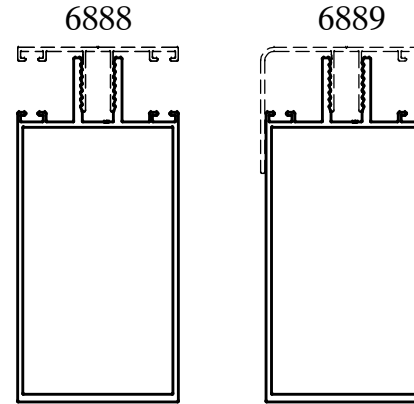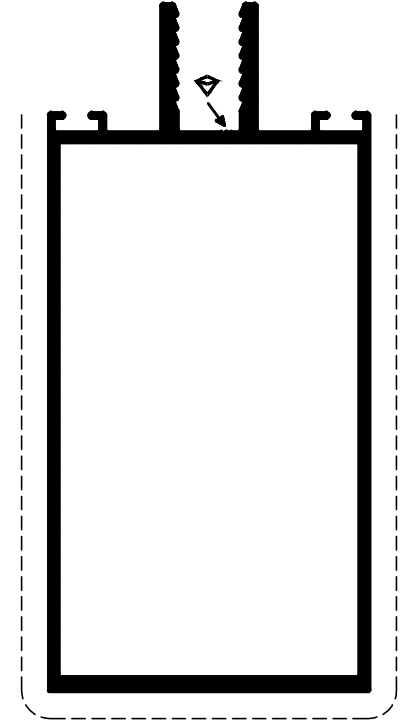

## Yüzey Kalitesi

	Dekoratif	Decorative
X	Standart	Standard
	Koruma	Protective anodizing

Tarih	29,01,2021	Alan	850.9 mm <sup>2</sup>	Şekil Fakt.	Ex-Oranı	Tolerans	EN 755-9
Çizen	Yavuz Soyyiğit	Gramaj	2.297 Kg/m	2-75	20-100	Malzeme	EN-AW 6060 T6
Ölçek	1/1 - 1.5/1	Çevre	472 mm	34	6" 7" 9"	Kovan Çapı	Ø160 Ø185 Ø235
					00 00 51		