
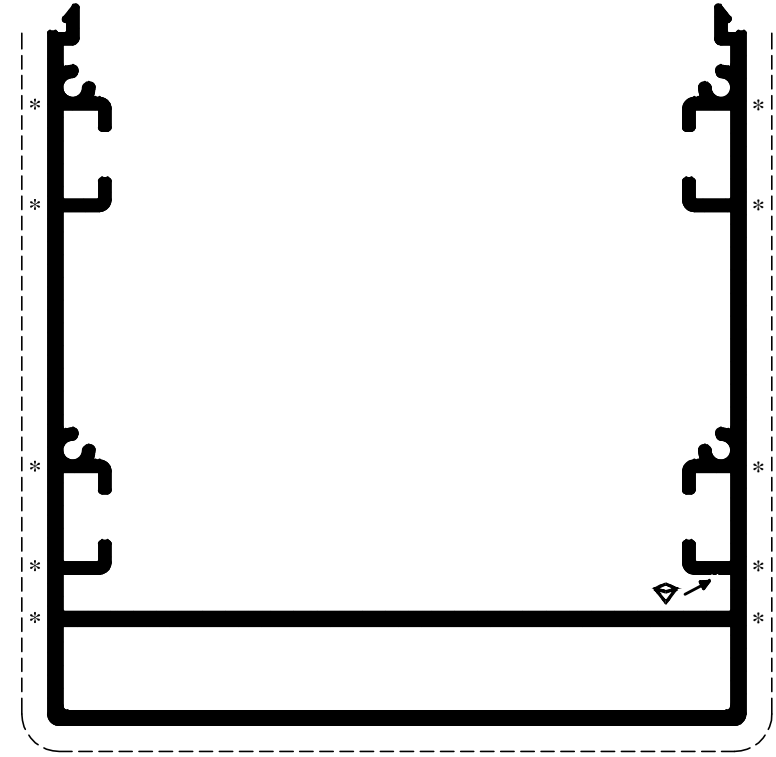
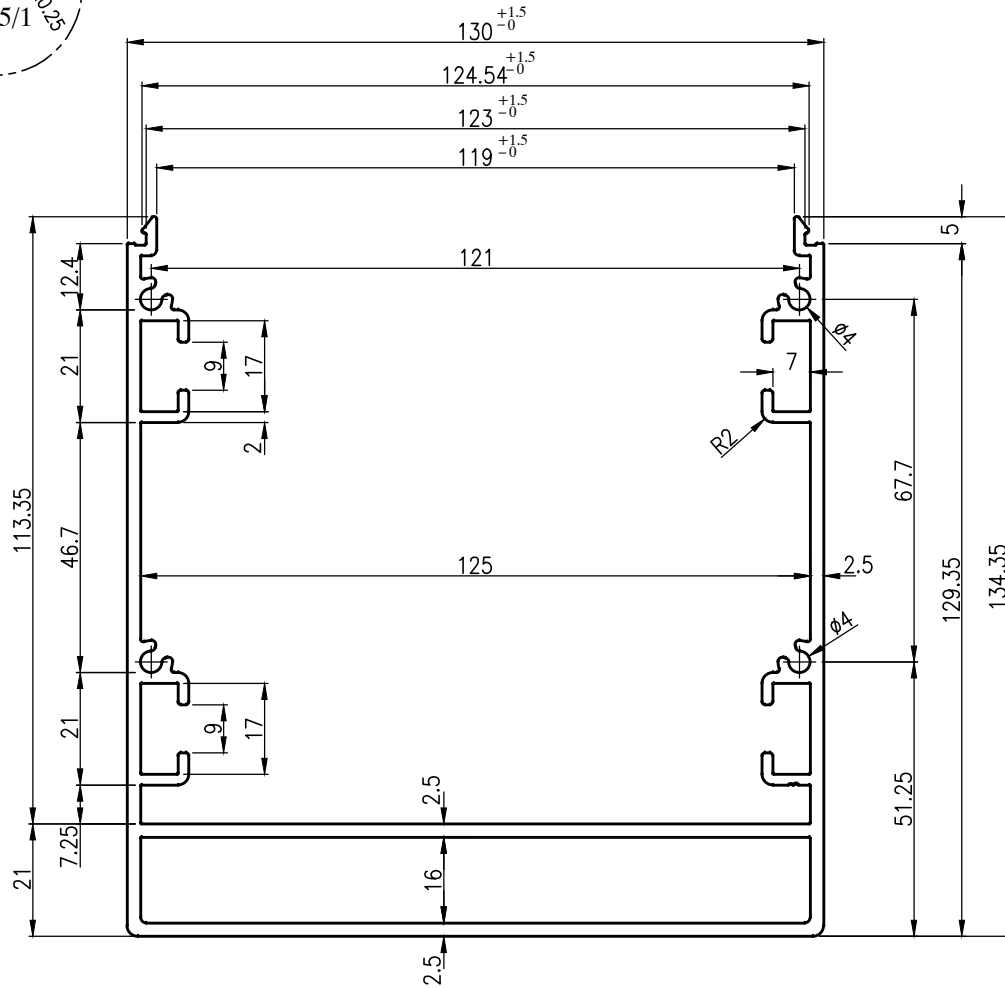


\*= Isı izi ve çekme izi olabilir



Moments of inertia: X: 21660189218.79

Y: 4306613081.50

Product of inertia: XY: -9652736586.55

Radii of gyration: X: 3734.37


Y: 1665.16

Principal moments and X-Y directions about centroid:


I: 2716530.08 along [1.00 0.00]

J: 4387751.24 along [0.00 1.00]

6891



6892



Yüzey Kalitesi

	Dekoratif	Decorative
X	Standart	Standard
	Koruma	Protective anodizing

Tarih	18,01,2021	Alan	1553.2 mm <sup>2</sup>	Şekil Fakt.	Ex-Oranı	Tolerans	EN 755-9
Çizen	Yavuz Soyyiğit	Gramaj	4.194 Kg/m	2-75	20-100	Malzeme	EN-AW 6060 T6
Ölçek	1/1 - 1/1	Çevre	990 mm	30	6" 7" 9"		